

# Window Smart Camera

## Quick Operation Manual




26-V02


# Catalogue

|            |                                                                                  |
|------------|----------------------------------------------------------------------------------|
| 01.....    | Product Description                                                              |
| 02.....    | Mounting Method                                                                  |
| 03.....    | Power on/Download the APP                                                        |
| 04.....    | APP Account Registration                                                         |
| 05-08..... | ADD Camera-BT Connection Guide<br>(Need to turn on BT and location)              |
| 9-10.....  | ADD Camera-QR-Code Mode Connection Guide<br>(No need to turn on BT and location) |
| 11.....    | APP Function Introduction                                                        |
| 12.....    | Main Interface                                                                   |
| 13.....    | Share the Device                                                                 |
| 14.....    | Motion Detection Setup                                                           |
| 15.....    | Activity Zone Setup                                                              |
| 16.....    | Recording/Format Setup                                                           |
| 17.....    | Detection Schedule Setup                                                         |
| 18.....    | Onvif/Rtsp Setup                                                                 |
| 19.....    | Alarm sound, Email                                                               |
| 20.....    | Computer Software                                                                |
| 21.....    | Device name/Call mode/Delete Device                                              |
| 22.....    | Help Center and Phone Customer Service                                           |

# Product Description



Horizontal viewing  
Angle bracket



Reset  
Long press  
for 2 seconds

A vertical line points from the text to a small rectangular button located between the Micro SD slot and the 5V Type-C port.



Pitch and azimuth  
Angle bracket


# Mounting method



1: Clean the glass thoroughly



2: Peel off adhesive tape



3: Press hard onto the glass




4: Outdoor Surveillance



5: Indoor Surveillance

# Power on

- (1) Please insert the micro SD card in the direction shown in the picture.
- (2) Plug in the power cord, wait for 30 seconds, and upon hearing an audible signal, connection initiation will begin.

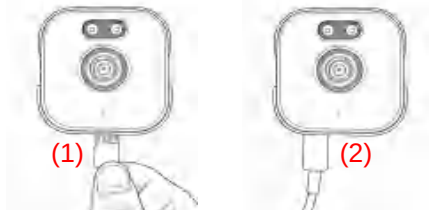

## Step-1 >>>

## Download the APP

Scan the QR code to download the APP.


Or search for "O-KAM PRO" to download through the app store (Google play/ APP Store).



Okam pro

## Step-2 >>> APP Account Registration


- (1) Click "Register now" at the login interface
  - Select the address
  - Enter your email
  - Get the verification code from email
- (2) After entering the verification code you need to set the password and click Finish.

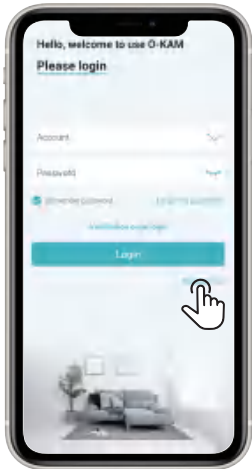



# Step-3 >>> BT Connection Guide

- (1) First, Turn on the BT function of the phone
- (2) Turn on your phone's location function. During this process, the APP will also pop up a prompt to enable location. Please  do not decline this prompt under any circumstances; otherwise, Bluetooth devices will not be detectable. **(Extremely Important)**
- (3) If you do not need to enable the location function, you can directly refer to **(Page 9)** to complete the camera pairing via the Scan the QR code to connect
- (4) Log in and click "Add" button found at the "Home" interface or click the "  " in the upper right corner.

Android

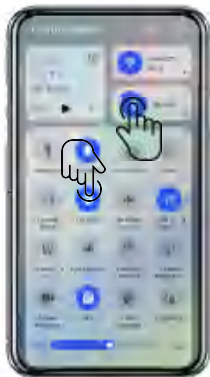

iPhone

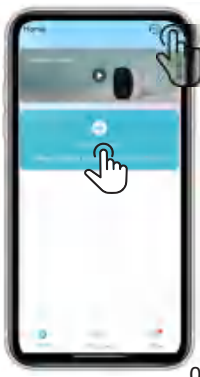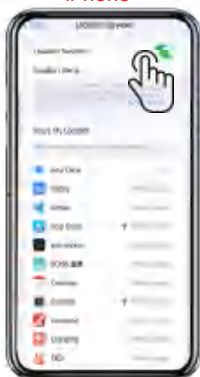

## Step-4 >>> BT Connection Method

- (1) Automatically Found new devices through BT function  
Then select the device and proceed to the next step.


**! Attention:** Device not found? Press 'Add' again first.  
Still nothing? Check that BT and location are enabled.

- (2) You can press and hold the button for 2 seconds to reset factory settings, then try connecting again.

(1)




(2)

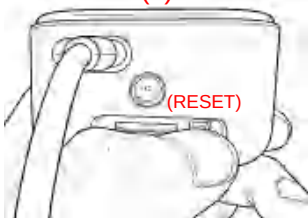



Enable the location service of your phone, and allow the O-KAM APP to access the location. Confirm the WiFi and enter the password.

\* Make sure the WiFi password case sensitive.





>>>

# Scan The QR Code To Connect

(1) Open the APP and scan the QR code on the device's camera.


(2) Select the WiFi device marked with "@IPC-" (Figure2), click Connect, and once the connection is established, return to the O-KAM Pro interface. (Figure3)

! When returning to the O-kam Pro interface, some mobile phones will pop up a prompt asking "Whether to connect to this wireless device". Please be sure to select "Confirm"; if you select "Cancel", it will result in failure to connect to the camera.

(1)



(2)

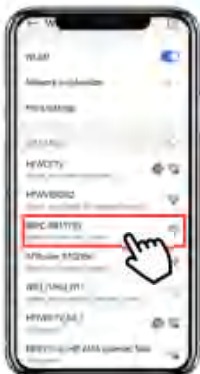

(3)



>>>

# Scan The QR Code To Connect

Open the video, then click "Connect the device to the internet now"  
Select a WiFi signal and enter the password (Figure 1)

## Alternatively:

Click Settings, then select "Device Settings". (Figure 2)  
Choose "Wi-Fi Network" (note: corrected "WI-FI" to "Wi-Fi" and  
"Netwok" to "Network"). (Figure 3)

Connect to the nearest router's network signal and enter the password. A prompt will appear first showing "Wireless connection in progress, please wait", followed by "Wireless connection succeeded" — confirm this prompt.

(1)


(2)

(3)



# Step-5 >>> APP Function Introduction

## Home Device Function Introduction

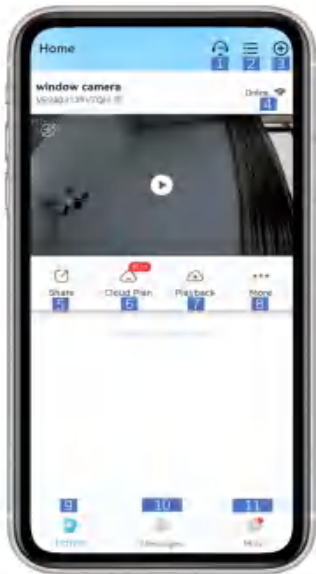

1....Online Customer Service

2....Switch the size of the screen

3....Add Device

4....Settings

5....Silence

6....Cloud Storage

7....Play Back

8....Settings/Silence

9....Home page

10....Messages

11....Mine




- 1....Cloud Service
- 2....Settings
- 3....SuperHD/HD/SD
- 4....Sound
- 5....More
- 6....Full Screen
- 7....Montion Detetion
- 8.....Intercom
- 9....Siren
- 10....Screenshot
- 11....Record
- 12....Night vision Setup
- 13....Activity Zone
- 14....Human frame
- 15.....Flip upside down
- 16....Live
- 17....Cloud playback
- 18....TF Card

## Step-7 >>>

## Share the Device

Enter the system settings " - Share

Sharing method: Share the QR code to a user. The other user adds the camera by scanning the QR code; The QR code is valid for 30 minutes, and one QR code can only be shared with one user. Generate more QR codes for more members. Maximum of 4 people can live view.

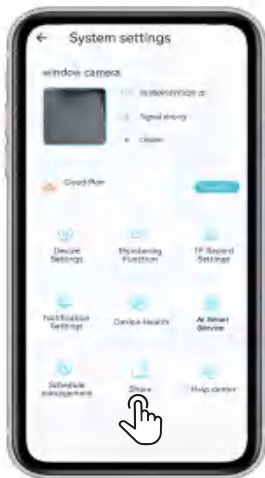

# Step-8 >>> Motion Detection Setup

Enter the system settings"




"-Monitoring Function

## Motion Detection

This mode may have a high false alarm rate, if you need to detect only suspicious people, we recommend you to choose Human Detection.

## Human Detection

The camera will send alarm notifications to your mobile phone only when it detects humanoid objects.

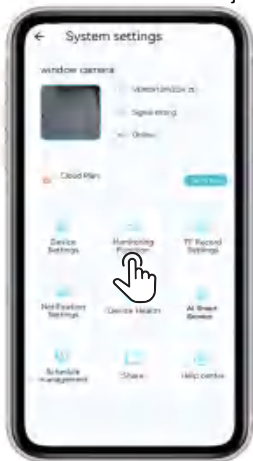




## Step- 9 >>> Activity Zone Setup

Enter the system settings"  "-Monitoring Function-Activity Zone

Setting the detection area allows the camera to detect a specific location, reducing the chance of false alarms.



Smear the area you don't need.

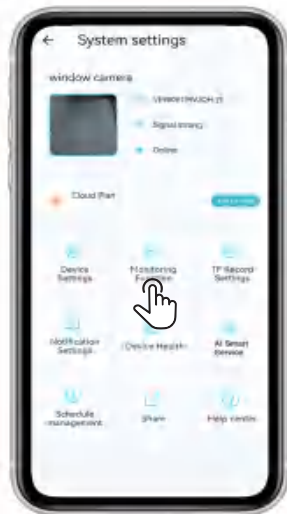

# Step- 10 >>> Recording/Format Setup

Enter the system settings"  "-TF Record Settings

Camera supports cloud storage and memory card recording, cloud storage requires subscription, the following memory card recording settings.

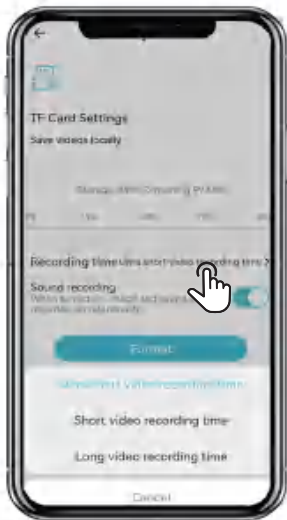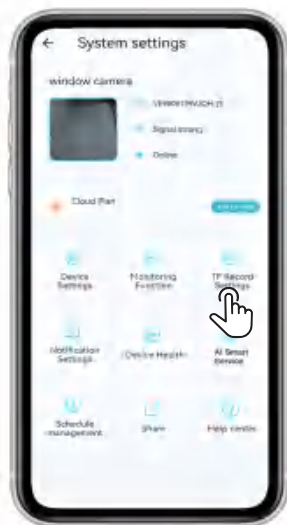


# Step- 11 >>>Detection Schedule Setup

System settings"⚙️"-Monitoring Function-Detection Schedule

Customize the schedule of Motion detection, reduce false alarms.

The camera automatically monitors for you during the scheduled time.

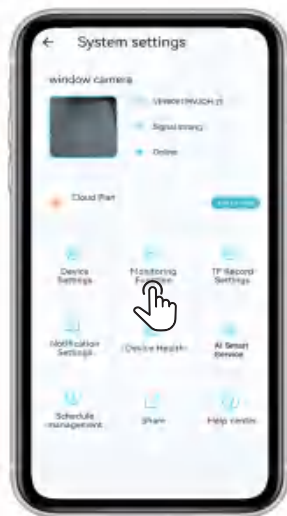


System settings"  "-Device Settings-Plaintext password Settings

For ONVIF compatibility, first enable the plain text password option in the O-KAM PRO app and set a password. This allows connection to. ONVIF-compatible software using the RTSP address below.  
RTSP Address Use the following format to connect to ONVIF-compatible software:

Rtsp://admin:password@192.168.xx.xx:10554/tcp/av0\_0

Replace password with the password you set in the app. Replace 192.168.xx.xx with the camera's actual IP address (find this in the app under Device Settings > Wi-Fi Network).

This RTSP address lets you stream video to third-party software that supports the ONVIF protocol, such as video management systems or media players.

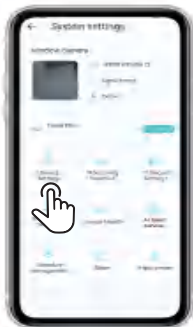


# Step-13>> Alarm sound and Email Setup

System settings"  "-Notification Settings

**Alarm sound:** Select a sound for the device siren

**Email notification:** An email will be sent to you when a motion is detected

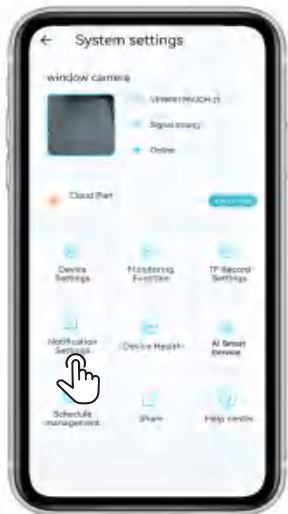

# Step-14>>


# Computer Software

Download Link (for Windows) :

**[https://doraemon.camera666.com/pc\\_OKAM.zip](https://doraemon.camera666.com/pc_OKAM.zip)**

Log into the computer software using the same username and password as the 'O-KAM pro' application account on your phone. No additional registration is required

 Due to continuous product updates, if new products cannot be displayed in this software, please download the latest version via the link above.

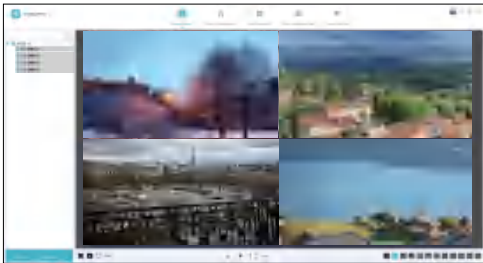

# Step-15 >>> Device name/Call mode/Delete Device


System settings"  "-Device Settings

**Device Name:** Update device name (1)

**Video Management:** 50HZ/60HZ (2)

**Call mode:** One-way intercom is enabled by default. Two-way audio can be set in Call mode. (3)

**Delete Device:** When updating the connection between your phone and the device, please first remove the old phone device, then long-press the camera's reset button for 2 seconds to restore the device to its factory settings (4)

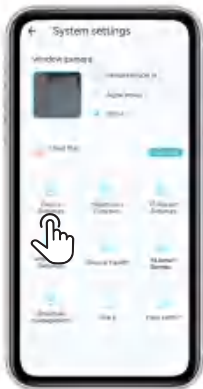

- 1 Click the Mine  button on the main interface Mine
- 2 Select Help Center and you can choose manual service. The online time for manual service is 09:00-18:00 Eastern Time. Customer service phone number: (+1)6468142996

